

DOME TWEETER LOUDSPEAKER GDWK 10/80/20

9 5155 164



TECHNICAL DATA

Rated impedance	8	Ω
Voice coil resistance	6,3	Ω
Rated frequency range	4 to 20	kHz
Resonance frequency	-	kHz
Recommended crossover frequency	4,8	kHz
Power handling capacity, P1/P2 measured with filter	80/5	W
Max. power	160/10	W
Sensitivity	91	dB
Flux density	1,16	T
Energy in air gap	104,6	mJ
Air - gap	25/3/0,745	mm
Voice coil height	1,9	mm
Magnet		
- material	ferrite	
- dimensions	2 x 65/32/10	mm
- mass	2 x 0,126	kg
Mass of loudspeaker	0,068	kg

Membrane material - cotton cloth.
Magnetic fluid - APG833

AVAILABLE VERSIONS

- GDWK 10/80/20 - 8 Ω , catalogue number 9 5155 164 02

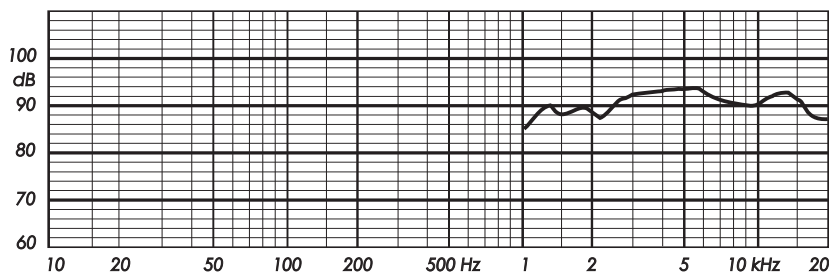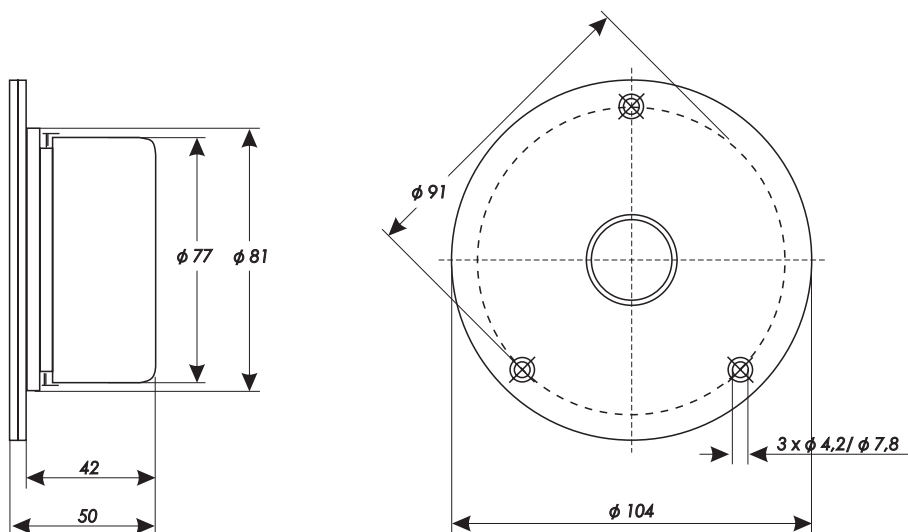

FREQUENCY RESPONSE CURVE

Measured in anechoic room at 1W/1m. Loudspeaker mounted
on IEC baffle

POLAND - WRZEŚNIA

TONSIL